



KEY FEATURES

- 1000W RMS power capacity (AES)
- Full range cabinet
- High quality custom premium European drivers
- Proprietary 75°x50° constant directivity horn
- Birch plywood cabinet
- Touring grade coating with textured black mat finish, Scratch Resistant coating
- Tropicalized moisture free construction (hardware and drivers)

SPECIFICATIONS


Power Handling	1000W RMS (AES) 2000W Program / 4000W Peak
Nominal impedance	4 ohms
Frequency response -6dB half space	45Hz – 19 KHz
Average Sensitivity	100dB/W/m
Calculated Maximum SPL / 1m	130dB continuous 133dB Program 136dB Peak
Nominal Directivity	75°x50°
Recommended low cut filter	30Hz 24dB/oct in full range mode 75-100Hz with subwoofer
Recommended amplifier	Up to 2000W (no clip) in specified frequency response
Low Frequency driver	Celto Acoustique 2x15" (2.5" VC)
High Frequency driver	Celto Acoustique 1" Exit (2" VC)
Crossover	1.7 KHz Passive
Flying hardware	7 M8 points
Connectors	NEUTRIK Speakon NL4
Floor Monitor use	No
Pole mount	35mm top hat
Cabinet	CNC made with tongue & groove assembly 15 and 18mm Russian birch plywood
Finish	Touring grade coating with textured black mat finish, Scratch Resistant coating
Size (WxHxD)	470x1160x480mm 18.5"x45.7"x18.9"
Weight	52Kg (114.6lbs)

APPLICATIONS

The QX215mkII Loudspeaker is a Dual 15" Two-way Loudspeaker suitable for

- Main PA Sound Reinforcement for Live Outdoor applications with or without Subwoofers
- As Main PA for Auditoriums, Clubs & Lounge Bars
- Indoor/Outdoor DJ and Live Club Applications
- AV presentations for rental companies

DRAWING

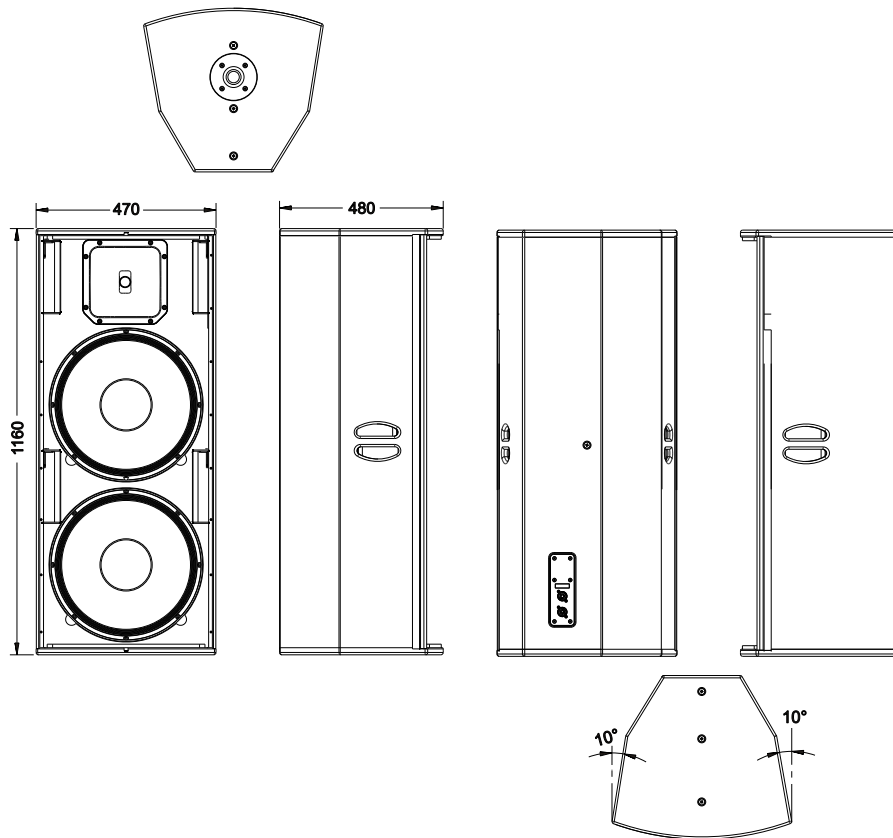

QX 215mkII

WIRING

