



## KEY FEATURES

- High output dual 12" Subwoofer
- 1000W RMS power handling
- Extremely compact footprint
- 124dB SPL continuous and 130dB peak Output
- Vented Enclosure
- European 12" LF driver (Celto Acoustique)
- Birch plywood CNC cabinet
- Touring grade coating with textured black mat finish
- Can be used horizontally as well as vertically
- Provision for pole mounting top


## SPECIFICATIONS

Power Handling	1000W RMS (AES) 2000W Program / 4000W Peak
Nominal impedance	4 ohms
Frequency response -6dB half space	38Hz - 1500 Hz
Average Sensitivity	100dB/W/m
Calculated Maximum SPL / 1m	124dB continuous 127dB Program 130dB Peak
Recommended low cut filter	35Hz 24dB/oct
Recommended amplifier	Up to 2000W (no clip)
Low Frequency driver	Celto Acoustique 2x12"
Crossover	No, only active mode with external crossover
Flying hardware	6 M10 with internal metal
Connectors	NEUTRIK Speakon NL4 MP
Pole mount	35mm top hat
Cabinet	CNC made with tongue & groove assembly 15 and 18mm Russian birch plywood
Finish	Touring grade coating with textured black mat finish, Scratch Resistant coating
Size (WxHxD)	750x370x500mm 29.5"x14.6"x19.7"
Weight	29Kg(63.9lbs)

## APPLICATIONS

The SW 212s is an Extremely compact, High output Dual 12" Subwoofer for bass reinforcement suitable for Permanent installation in Clubs, Restaurants, Lounge bars, conference & Boardrooms, Home theater applications and other indoor venues. Being compact allows the subwoofer to be placed in environments where aesthetics plays an important role. Coupled with its high output and 1000W power handling it is capable of extremely high low frequency reproduction.

## DRAWING

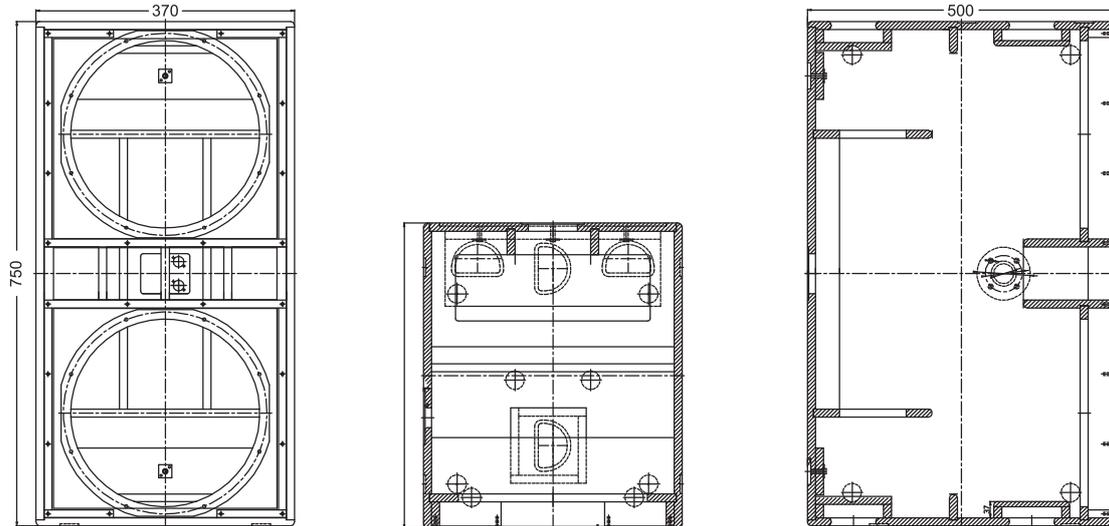

## WIRING

