iComm SMS42T Indoor Surface Mount Speaker





KEY FEATURES

- High quality, two way surface mount speaker for indoor applications
- LF 4" woofer, HF dome tweeter for smooth HF response
- Only 100V operation possible. 100V LMT inbuilt, 25W tapping
- Attractive trapezoidal ABS cabinet with integrated feet for keeping on a flat surface / counter
- Innovative design with easy mounting adjustable swivel bracket for horizontal and vertical mounting on wall / ceiling
- Retractable ceiling suspension point for flying
- Spring push terminals for easy connectivity
- Available in Black colour


APPLICATIONS

The iComm SMS42T is two way multipurpose surface mount speaker suitable for

- Indoor applications: Restaurants, offices, museums, home theater, auditoriums, gymnasiums, F&B establishments
- Outdoor applications: Atriums, pool side, patios, backyards and more
- Contractors, custom installers & retail stores

iComm SMS42T Indoor Surface Mount Speaker



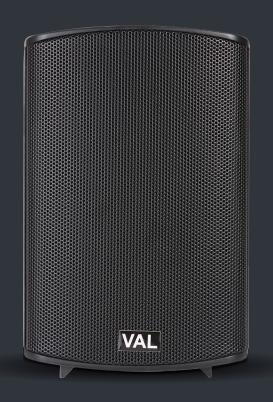



SPECIFICATIONS	
Power Handling (AES Standard)	25W RMS / 50W Program / 100W Peak
Nominal Impedance	8 ohms
Frequency Response (-10dB)	105Hz – 19KHz
Average Sensitivity	84dB/W/m
Calculated Max SPL	97.5dB Continuous / 100.5dB Program / 103.5dB Peak
Low Frequency Driver	4" woofer
High Frequency Driver	0.5" Dome tweeter
Input Connectors	Spring loaded push type terminals
100V/70V Input	NA
Cabinet	High quality ABS with aluminum grille
Colour	Black
Wall mount bracket	Swivel U bracket for horizontal and vertical mounting
Size (WxHxD)	131 x 200 x 130mm
Net weight	1.15Kg